



(1) Cast Iron Riser Ring with (4) 3/8" set screws  
 set firmly in Base Ring, may be  
 used with Asphalt only!  
 RISER RINGS ARE NOT TO BE USED  
 WITH CONCRETE COLLARS.  
 No low profile base rings are allowed.

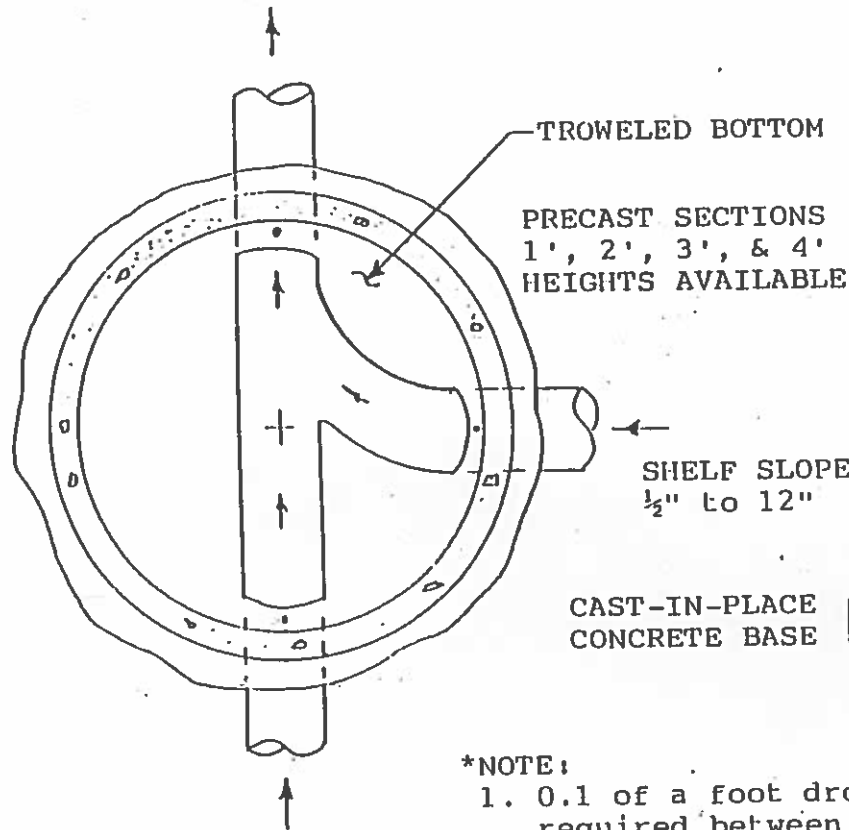

PLAN  
N.T.S.

**\*NOTE:**

1. 0.1 of a foot drop required between inlets and outlet. Straight through pipe can match pipe slope.
2. NO LEAKAGE ALLOWED!
3. Provide a pipe joint within 18" of Outside face of manhole.

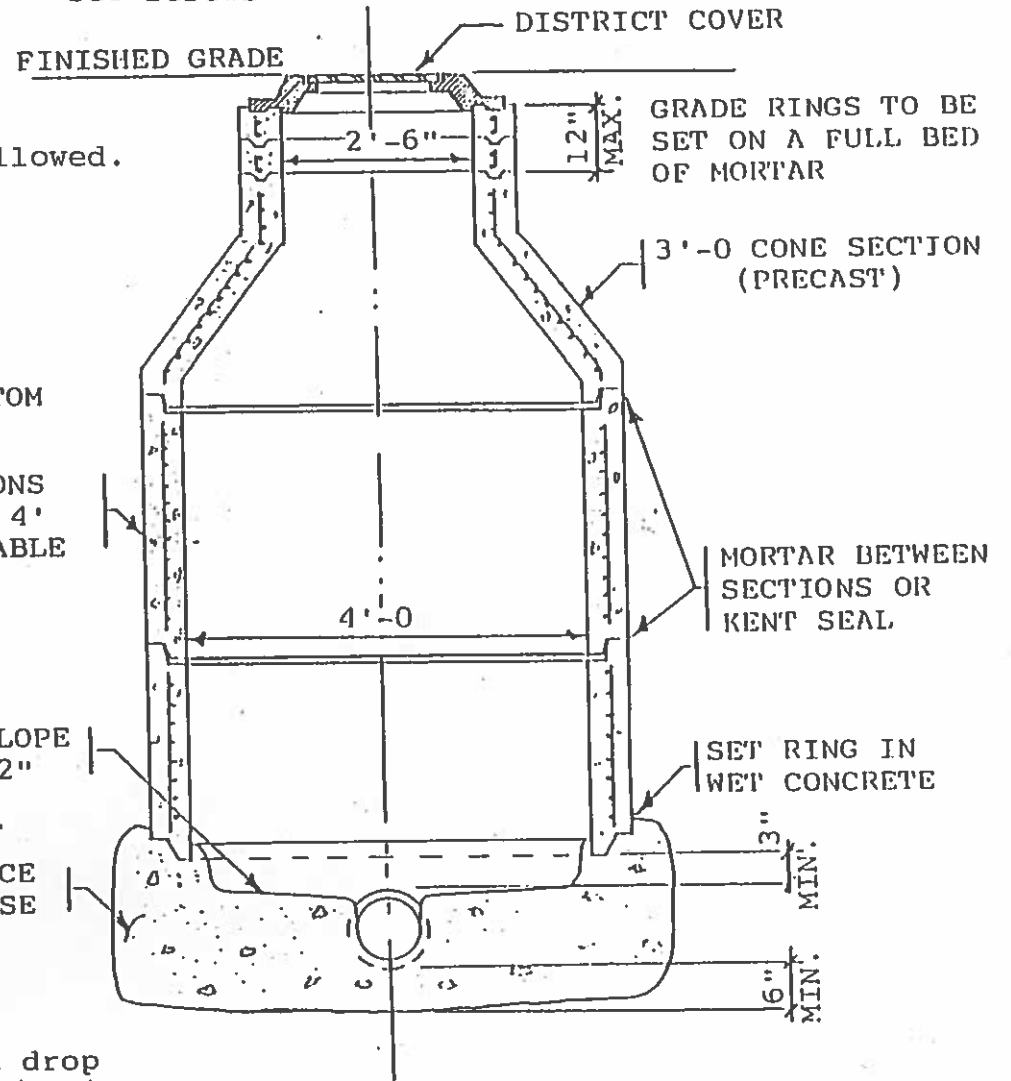

ELEVATION  
N.T.S.

<b>MANHOLE SECTIONS</b>
SALT LAKE CITY SUBURBAN SANITARY DISTRICT NO.1
Jan. 1986